

PRE9270

Instructions - page 1 of 2

Run timer



Cleverly simple
control of energy.




DESCRIPTION

The PRE9270 run back timer is a high output electronic timer which provides control for a wide range of loads. Its powerful 20A output makes it particularly suitable for the control of immersion heaters. The unit allows an appliance to be powered for a set time period which can be adjusted by the user. A simple display shows the user how much time is left to run. An ON/OFF switch allows the user to cancel the timing program whilst a memory remembers the last timing sequence selected.

To operate the unit, follow these steps:

1. Press and release the TIME button to select the desired time period. The LED will flash next to the selected time.
2. Press the ON/OFF button to start—the LED will stay on next to the selected time.
3. As the unit times out the position of the LED will drop down to show how much time is left.
4. Pressing the ON/OFF button during timing will turn the unit off.
5. At any stage during timing, pressing the TIME button will set a new time period.


When the unit has turned off, it is not necessary to select the time period again, just press the ON/OFF to repeat the previous time period.

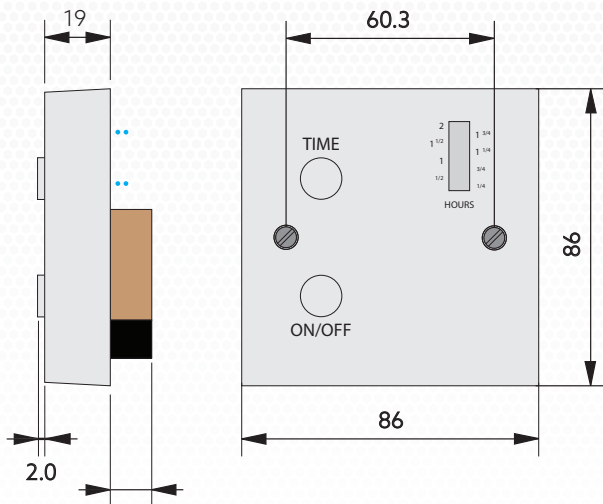

INSTALLATION

Warning. This device works at mains potential. Be sure to take care when working with electricity.

1. Make sure the load is connected and in working order.
2. If fitting to a metal back box ensure that top and bottom lugs are removed.
3. Isolate the mains supply to the circuit at the main consumer unit.
4. Connect the controller via the terminal block. Live supply to the L terminal, the load to the LIVE OUT terminal and neutral to the N terminal.
5. Screw the unit to the wall and switch the mains supply back on at the distribution board.

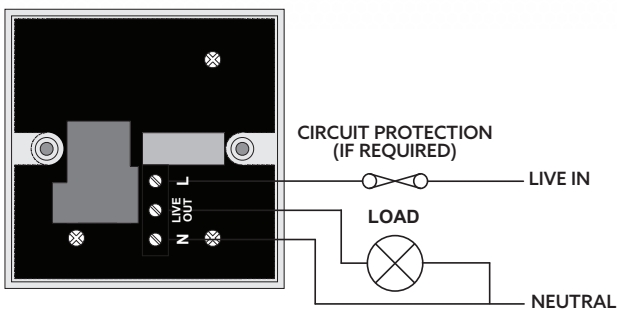

Due to our policy of continuous improvement, we reserve the right to change specifications without notice. All information was correct at time of when this product file was produced - April 2020

PRE9270

Instructions - **page 2** of 2

Run timer



Cleverly simple
control of energy.

SPECIFICATION

Load:	25 Amp resistive load (including immersion heaters). 6 Amp fluorescent lighting. 3 Amp compact fluorescent lighting 3 Amp low energy lighting. 3 Amp low voltage lighting (switch primary of transformer). Fluorescent lighting (max 6 fittings recommended)
Supply voltage:	220-240 Volts AC 50 Hz
Time out period:	15 minutes to 2 hours in 15 minute increments.
Fixing method:	Surface fixing 25mm deep plastic surface mount moulded box. Flush fixing 25mm steel wall box or 32mm deep cavity wall box.
Terminal capacity:	4.0mm ²
Material:	Flame retardant ABS Class 2
Type:	Class 2
Temperature:	-10°C to 35°C
Conformity:	EMC-89/336/EEC. LVD-73/23/EEC

WE RECOMMEND THIS PRODUCT BE INSTALLED BY A COMPETENT PERSON IN ACCORDANCE WITH IEE REGULATIONS IN FORCE AT THE TIME.

Due to our policy of continuous improvement, we reserve the right to change specifications without notice. All information was correct at time of when this product file was produced - April 2020

Prefect Controls Limited, Unit 2, Church Field Business Park, Church Field Road, Sudbury CO10 2YF
01787 320604 | mail@prefectcontrols.com | prefectcontrols.com

10177