

PRE3203

No neutral wall-mounted PIR with manual override

Wiring diagram page 1 of 1




Cleverly simple
control of energy.



Rear view of Sensor

Avoid direct sunlight from entering the sensor, Do not site within 1 Metre of forced heating/cooling ventilation, do not site within 1 Metre of any lighting. Mount in a surface or sunken pattress box of 25mm or greater, do not mount on a vibrating surface. Mount the sensor between 1.2 and 1.5 Meters, Note that the higher the sensor is mounted the shorter the detection range will be.

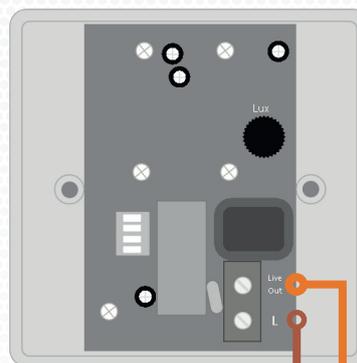

Mains Supply

Live out from sensor to
light fitting



Due to our policy of continuous improvement, we reserve the right to change specifications without notice. All information was correct at time of when this product file was produced - April 2020