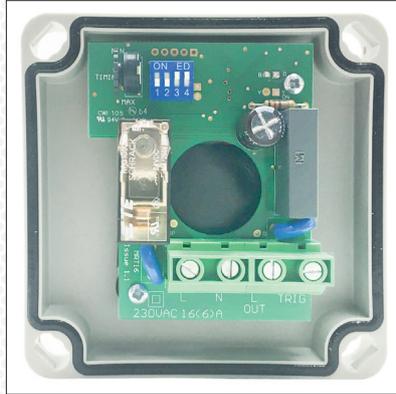# PRE9290

IP66 Touch Activated Timer

Wiring diagram **page 1** of 1
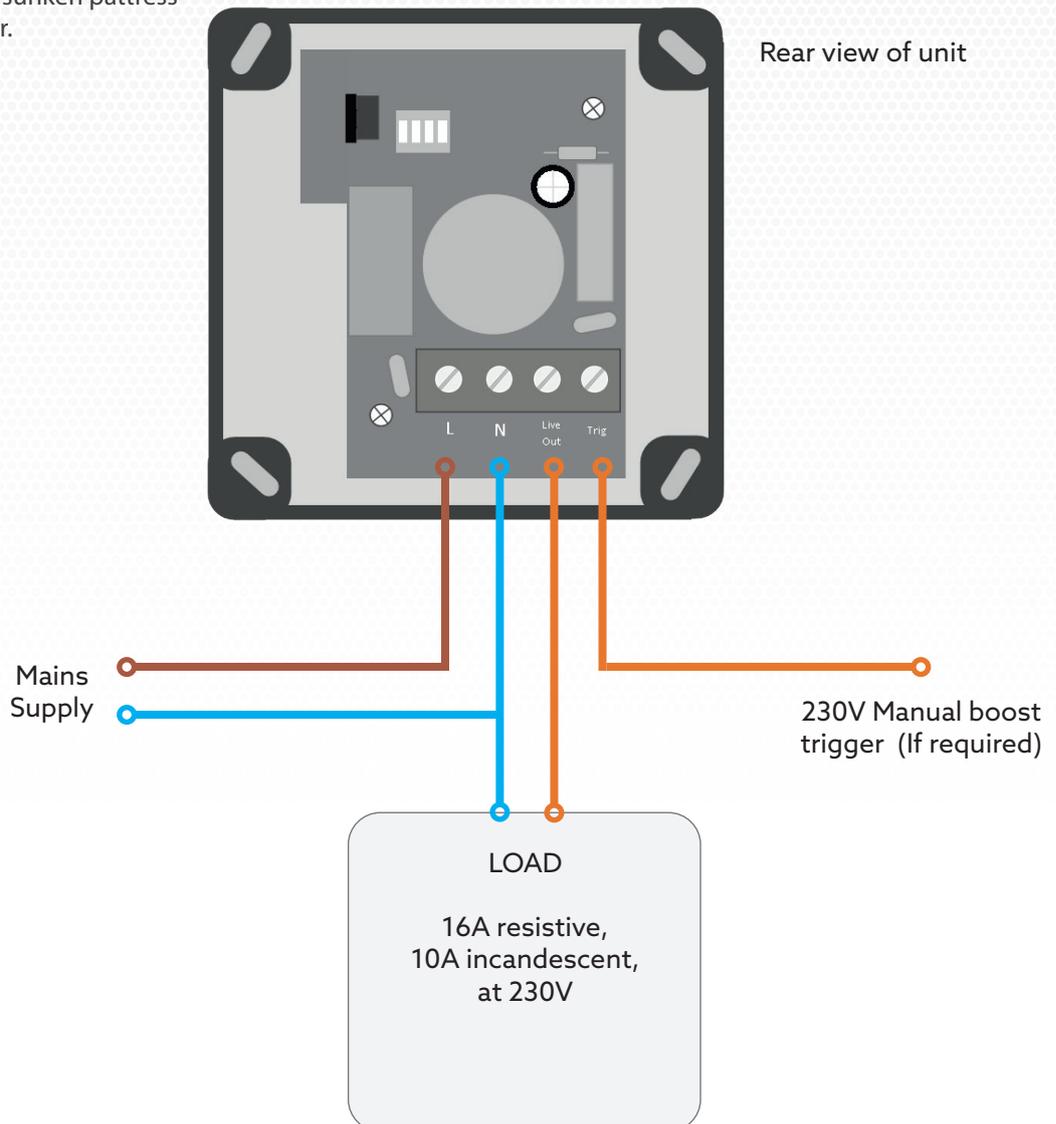
Prefect

**Cleverly simple
control** of energy.

Mount in a surface or sunken pattress box of 25mm or larger.

Rear view of unit

L N Live Out Trig

Mains
Supply

230V Manual boost
trigger (If required)

LOAD

16A resistive,
10A incandescent,
at 230V

10239