

Fluid-filled radiator range
Prefect Accessio EnergyLock

Cleverly simple **control** of energy.

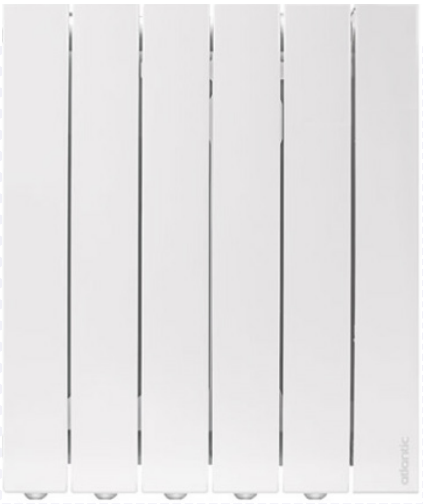

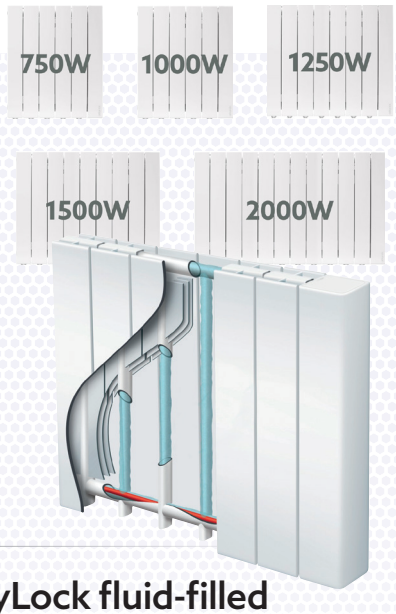

Key features

- Rating (at 230v AC)
- IP24 Rated
- Double insulated ⧈
- Fluid-filled
- Lot 20 compliant with Prefect IRUS and ecostat2 range
- Complies with EN55014 / 1:2006 / A1:2009 / A2:2011
- Slim Design
- Silent Operation
- 5 Year warranty

The Accessio range of EnergyLock fluid-filled radiators is designed specifically to work alongside Prefect IRUS & ecostat2 heating controls.

Elegant design, robust manufacturing and outstanding performance makes it an ideal choice for student accommodation.

The Accessio incorporates Prefects patented EnergyLock - giving Energy Managers access to the unique control features of the Irus central control and Ecostat2 local control systems. Savings of up to 25% have been attained compared with mechanical convectors. Providers of student accommodation now have the choice of an alternative heater style and performance profile.

This modern, silent radiator includes innovative thermofluid technology that gives a quick but gentle warmth and a healthy heat diffusion that doesn't dry the air. Accessio has been compared with the comfort of a central heating system, maintaining longer-lasting heat even after power to the radiator has been turned off.

EnergyLock-Accessio is available in 750W, 1000W, 1250W, 1500W and 2000W outputs, but measurements, due to the compact design, are only 575mm tall and 127mm deep with varying widths of 490mm (750W) to 973mm (2000W). The range has an appropriate heater for any application.


Installation is as easy as securing the simple 'H' design mounting bracket to the wall with four screws, lifting the unit onto the supports and locking it securely in place. For future redecoration the unit is simply unlocked and tilted forward to gain access to the wall behind.

EnergyLock-Accessio is fully compliant with Lot20 and is ErP regulation ready. The ErP (Energy-related Products) directive encourages manufacturers, and/or importers, to offer products designed to reduce their overall impact on the environment, including the resources consumed during manufacture and disposal.

Only supplied with Prefect LOT20 compliant control (sold separately).



Cable exit point left hand side on the rear of the radiator.

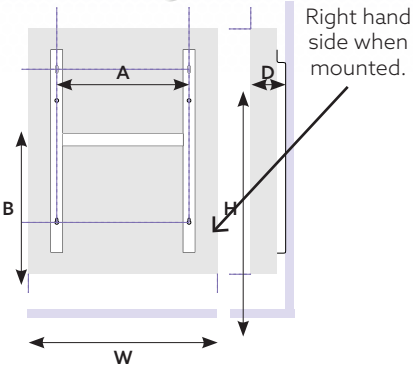

Right hand side when mounted.

Part number	Output (W)	Width	Height	Depth	A	B	Net weight (kg)
PRE-AH573213	750	490	575	127	241	330	9.9
PRE-AH573214	1000	490	575	127	241	330	9.9
PRE-AH573215	1250	651	575	127	400	330	13.2
PRE-AH573216	1500	732	575	127	400	330	14.8
PRE-AH573217	2000	973	575	127	724	330	19.7

NOTE: All Prefect Atlantic heaters are A Class II or double insulated electrical appliances this means that the heater has been designed and built in such a way that it does not require a connection to electrical earth (ground). ⧈ This is the double insulated symbol for electrical equipment A double insulated appliance displays the symbol above; the square inside a square symbol refers to 2 layers of insulation, thus double insulation. Double Insulated/Double Insulation All Atlantic heaters conform to this standard.

Due to our policy of continuous improvement, we reserve the right to change specifications without notice.
All information was correct at time of when this product file was produced - November 2020 - (Amended January 2025)

Prefect Controls Limited, Unit 2, Church Field Business Park, Church Field Road, Sudbury CO10 2YF
01787 320604 | **info@prefectcontrols.com** | **prefectcontrols.com**