


irus PRE2000W2-4

Twin element hot water tank kit



Cleverly simple
control of energy.

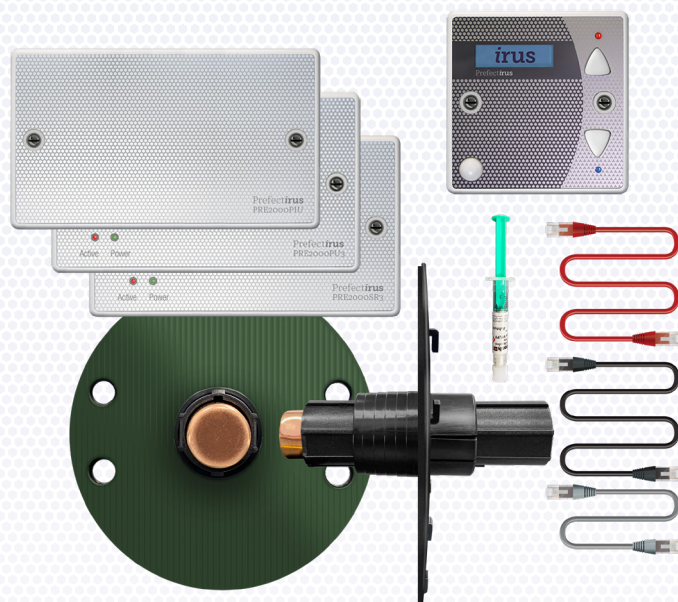

Key features

Kit components:

- PRE2000CU3 Control head unit
- PRE2000PIU Probe Interface Unit
- PRE2000PU3 Power unit
- PRE2000SR3 Slave Relay
- PRE2000TTS2-R Upper temperature sensor
- PRE2000TTS2-B Lower temperature sensor
- 3 x RJ45 cables
- Thermal Paste
- Upper and Lower temperature sensors
- LV control Head
- Remote monitoring and control
- Autonomous control
- DUoS and TNUoS optimisation
- Leak detection sensor (optional)
- Measures RMS current
- 5-year warranty

The Prefect Irus PRE2000W2-4 is a complete kit of components for connecting a twin element hot water tank system to the Prefect Irus control system.

The PRE2000W2-4 Kit comprises all the necessary components for connecting a twin element hot water tank system to Prefect Irus.

The PRE2000CU3 is the control head unit and the control element of the kit. The head unit collects and stores data from the sensors and controls the PRE2000PU3 and PRE2000SR3 switching power to the elements.

The PRE2000PU3 power unit is the power supply for the low voltage head unit and the PRE2000SR3. The power unit houses a 16A relay for switching the 1st element when commanded by the head unit. The power unit utilises mains bourne signalling to transmit and receive data and commands between the head unit and Prefect Irus central control. Using the RJ45 connection, the PU3 connects the slave relay to the control head unit affording the use of a second relay.

The PRE2000SR3 slave relay is a secondary relay unit. The slave relay is connected by either a low voltage wiring connection or direct connection to the PU3 using the supplied 300mm RJ45 patch lead.

Once connected to the PU3 the slave relay can be directly controlled via the control head unit along side the PU3, the slave relay has a 16A relay output to control the second element.

The PRE2000TTS2-R & PRE2000TTS2-B are temperature sensors for hot water tanks with either a foam or metal jacket. The R is the Upper temperature sensor coloured red for easy and reliable identification. The B is the Lower temperature sensor coloured black. The sensors incorporate a copper contact.

The THERMAL PASTE, in the supplied syringe, should be applied to the whole face of the copper head of the tank probes (approx 1mm depth) before they are inserted into the bores.

The PROBE sensor is then inserted through the upper mounting flange and pushed until the shaft will go no further, and the copper head is compressed into the shaft providing a sound contact between the two surfaces resulting in accurate temperature measurement.

Due to our policy of continuous improvement, we reserve the right to change specifications without notice.
All information was correct at time of when this product file was produced - April 2022