




Cleverly simple  
**control of energy.**



PRE9276 single gang  
30Amp 6.9kW

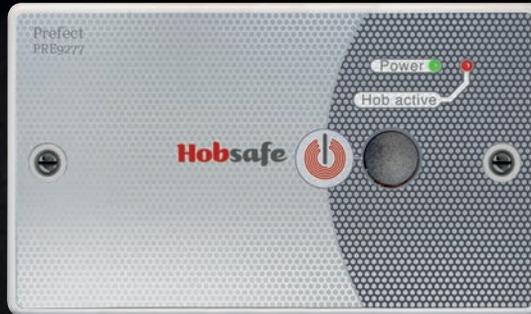

PRE9277L double gang  
40Amp 9.2kW - landscape



PRE9277P double gang  
40Amp 9.2kW - portrait

# Hobsafe

## Making kitchens safer



**Hobsafe provides the most practical and cost-effective way to prevent hobs from being left on.**

Ideal for student accommodation, hostels or leisure parks, Hobsafe provides peace of mind for safety conscious landlords and care partners of those living with dementia.

Hobsafe's robust, tamper-proof design with large switching capacity fits most hobs and is a favourite with electricians because the large terminals make it easy to install. It's also popular with users and landlords for its effectiveness and ease of use.

The 15, 20, 30 and 45-minute run times provide ample scope for all levels of culinary capability.

Run times are settable during installation via setting switches on the rear of the timer. To access these switches the unit must be removed from the wall box, ensuring time ranges cannot be easily changed by the end user.

The two models, 30A (6.9kW) or 40A (9.2kW) switching capacity, enables use

with a wide range of hobs. Installation is aided by large terminals boasting a maximum cable size of 13.2mm<sup>2</sup>. The timer also provides both a neutral feed terminal and a neutral output terminal eliminating the issue of doubling up two cables into one terminal.

The timer is moulded in PC/ABS making the timer extremely durable. PC/ABS is fully UV stable and is resistant to cleaning products. A gloss finish overlay allows for easy cleaning.

Two modes of operation are available: Fixed mode and ON/OFF mode. When set to fixed mode the time run will start on a button press and will continue until the time run has elapsed. When set to ON/OFF mode the time run can be stopped at any point during the time run.

Simple on/off button operation and clear LED indicators allow for easy use.

When the current time run is about to expire, the red hob active LED will flash to warn that the timer is about to switch off, allowing the timer to be reset if necessary.

- Four settable run times 15,20, 30 or 45 minutes
- Two selectable modes ON/OFF or fixed
- Power and Active LEDs
- 1 gang and 2 gang models
- 30Amp (upto 6.9kW loading) and 40Amp (upto 9.2kW loading) versions
- 40Amp model - portrait or landscape
- Terminal capacity - Minimum 0.6mm<sup>2</sup>, Maximum 13.2mm<sup>2</sup> cable size
- Supply Voltage - 230V AC at 50Hz
- Conformance - EN60730
- Prefect Direct installation service available please contact us for a quote
- 5-year warranty

So, whether warming a tin of beans or frying a fillet steak - whatever the dish, it could be ruined, and so could the kitchen, if pans on hobs are left unattended - Hobsafe helps to reduce the risk of disasterous dining.

**Please Note:** This Prefect product is designed to limit the time the hob is powered on. It does not detect fire or alert if a pan fire occurs, therefore this product does not comply with EN 50615.